

Belanko™ S

S I M P L I C I T Y

M E E T S S T Y L E

 **legrand®**

CONTENTS

- 02 Stylish design
- 04 Safe and swift installation
- 06 Strong offerings
- 08 Sensible functions for hotels
- 10 Scalable setup
- 12 Catalogue pages
- 19 Healthcare application
- 22 Selection charts

S I M P L



STYLE

ICITY



SAFETY



STYLISH DESIGN

Timeless classics meet a new favourite

There is always room for the basic white and ivory colours because they blend perfectly with every room design. For something different, **Belanko™ S** also offers the anthracite finish.



Glossy finish for
easy cleaning

Thin matt finish
edging for a
distinctive look

Slim profile for
a modern touch

Subtle enhancements that make a difference

Essentials always work. **Belanko™ S** ticks all the boxes for the essential range with a little extra – premium quality, clean lines, smooth surface and slim profile.



White



Anthracite



Ivory¹

SAFE AND SWIFT INSTALLATION



Flexibility

Oblong shaped holes provide flexibility for easy adjustment when the switch is not set straight



Safe installation

No access to live metal parts even if the cover plate and plate are not installed



All-in-one

Switch plate and rocker are supplied as a set to enable quick installation



Safer for the installer, safer for the user

We share the same goal. To get the job done fast, safely and perfectly. **Belanko™ S** was engineered to meet just that purpose.




Just one click

Clip up to a 4 gang switch single-handed

ION

Robustness

Ribs make the switch sturdy

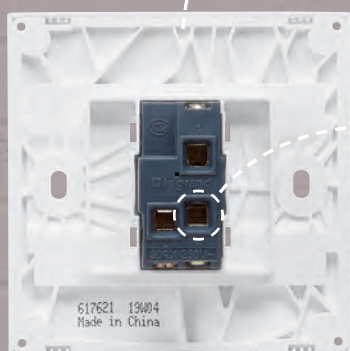

Easy wiring

Save time with ready-to-wire screw terminals




Perfect protection for a neat result

The soft protection film keeps the product safe from dust and scratches until the work has been completed. Only the soft protection film will get stained by the ongoing wall paintwork.




STRONG

OFFERINGS




3 gang switch



4 gang switch



BS socket outlet with
USB A-Type charger

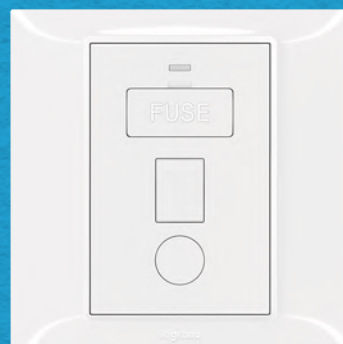

Switched fused connection unit
with neon and cord outlet

Above standard selection for standard homes

There is no place like home. Make it comfortable and optimal for modern lifestyles.



Universal dimmer suitable for all modern loads



Dimmable LEDs



Dimmable compact fluorescent lamps



Halogen with electronic or ferromagnetic transformer



Incandescent and halogen lamps



BS socket outlet with USB A-Type charger and IP55 cover



Suitable for outdoor use

The splash-proof cover allows a 1 gang Belanko™ S mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.

SENSIBLE

FUNCTION FOR HOTELS




Indicator for corridor



Key card switch



Internal control unit

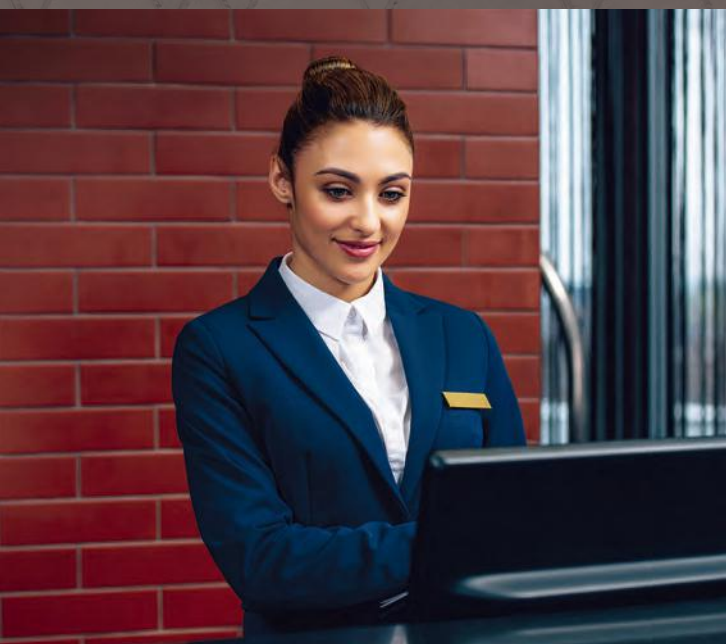


A comprehensive range of hospitality applications

The best compliment for a hotel is when guests feel at home. Now, be a hospitable host at all times with **Belanko™ S** thanks to its hospitality functions.

Compliant with Guest Room Management Systems for hotel operators to efficiently control and manage facilities

N S

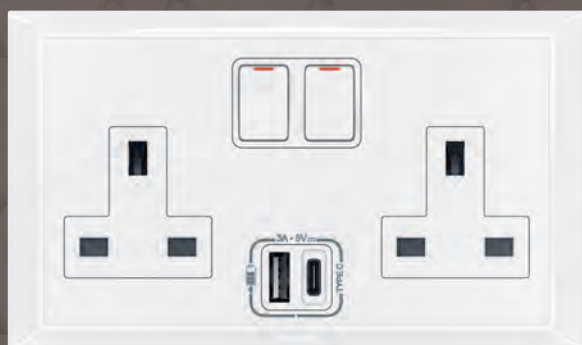

BS socket outlet with USB A-Type and C-Type charger



Keystone data socket

A modern office interior featuring white desks, ergonomic chairs, and computer monitors. The scene is captured through a circular frame that is part of a larger grey background. The office has large windows and a clean, minimalist aesthetic.

SCALABLE

SETUP

Infinite possibilities with
limitless combinations

There is no need to settle for less.
Belanko™ S works both independently
and with the Arteor range. The Arteor
adaptor offers perfect versatility
for your every need – hospitality,
residential and commercial projects.




Automatic switch



Skirting light



Light
whenever and
wherever needed

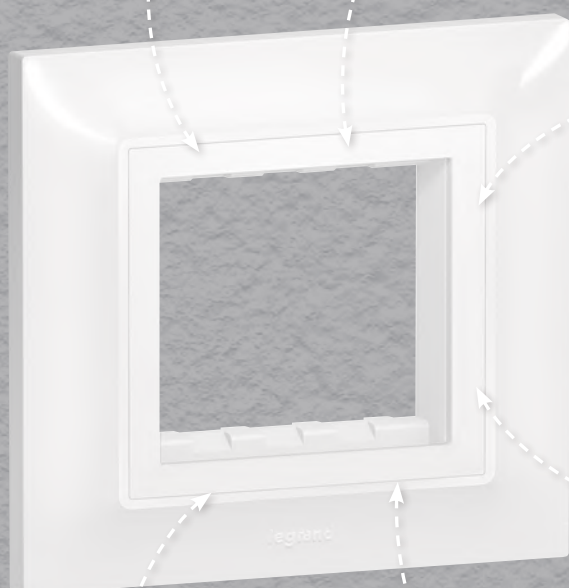

Adaptor for Arteor
mechanism



Electronic room thermostat



Temperature
controlled
every day,
every minute



Sensitive switch



No contact
needed to switch
on and off



Power up
quickly and
easily



USB C-Type charger



HDMI socket



Quality display
ready and
available

...and more.

Belanko™ S

single pole switches and push-buttons



6 176 01



6 176 05



6 176 07



6 176 11



6 176 16

Conform to BS EN 60669-1

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	6 176 00	1 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 00	
10	6 178 00 ¹	
10	6 176 01	1 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 01	
10	6 178 01 ¹	
10	6 176 02	2 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 02	
10	6 178 02 ¹	
10	6 176 03	2 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 03	
10	6 178 03 ¹	
10	6 176 09	Intermediate switch ○ White ● Anthracite ○ Ivory
10	6 177 09	
10	6 178 09 ¹	
10	6 176 04	3 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 04	
10	6 178 04 ¹	
10	6 176 05	3 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 05	
10	6 178 05 ¹	
10	6 176 06	4 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 06	
10	6 178 06 ¹	
10	6 176 07	4 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 07	
10	6 178 07 ¹	

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
10	6 176 20	1 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 20	
10	6 178 20 ¹	
10	6 176 21	1 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 21	
10	6 178 21 ¹	
10	6 176 22	2 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 22	
10	6 178 22 ¹	
10	6 176 23	2 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 23	
10	6 178 23 ¹	
10	6 176 24	3 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 24	
10	6 178 24 ¹	
10	6 176 25	3 gang - 2-way switch ○ White ● Anthracite ○ Ivory
10	6 177 25	
10	6 178 25 ¹	
10	6 176 10	1 gang ○ White ● Anthracite ○ Ivory
10	6 177 10	
10	6 178 10 ¹	
10	6 176 15	2 gang ○ White ● Anthracite ○ Ivory
10	6 177 15	
10	6 178 15 ¹	
10	6 176 11	Bell push ○ White ● Anthracite ○ Ivory
10	6 177 11	
10	6 178 11 ¹	
10	6 176 16	2 gang for shutters ○ White ● Anthracite ○ Ivory
10	6 177 16	
10	6 178 16 ¹	

1: Available on request

Belanko™ S

double pole switches and cooker control unit



6 176 72



6 176 29



6 176 76

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 176 71	1 gang - 1-way switch + red neon indicator + earth connection ○ White ● Anthracite ○ Ivory
10	6 177 71	
10	6 178 71 ¹	
10	6 176 72	1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking ○ White ● Anthracite ○ Ivory
10	6 177 72	
10	6 178 72 ¹	
5	6 176 29	Double pole switches 32 A - 250 V~ 1 gang 1-way switch + led power indicator ○ White ● Anthracite ○ Ivory
5	6 177 29	
5	6 178 29	
5	6 176 75	Double pole switches 45 A - 250 V~ 1 gang - 1-way switch ○ White ● Anthracite ○ Ivory
5	6 177 75	
5	6 178 75 ¹	
5	6 176 76	1 gang - 1-way switch + red neon indicator ○ White ● Anthracite ○ Ivory
5	6 177 76	
5	6 178 76 ¹	
5	6 176 77	2 gang - 1-way vertical switch + red neon indicator ○ White ● Anthracite ○ Ivory
5	6 177 77	
5	6 178 77 ¹	
5	6 176 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon ○ White ● Anthracite ○ Ivory
5	6 177 78	
5	6 178 78 ¹	

1: Available on request

Belanko™ S

dimmers and ventilation control



6 176 35



6 176 33

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 176 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz - 60-500 W for incandescent and halogen lamps ○ White ● Anthracite ○ Ivory
1	6 177 31	
1	6 178 31 ¹	
1	6 176 35	300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White ● Anthracite ○ Ivory
1	6 177 35	
1	6 178 35 ¹	
1	0 401 49	Active Power Compensator Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W
1	6 176 33	Ventilation control Conform to BS EN 60669-1 Fan control 250 V~ - 50 Hz ○ White ● Anthracite ○ Ivory
1	6 177 33	
1	6 178 33 ¹	

1: Available on request

Belanko™ S

television, telephone and data sockets



6 176 27



6 176 38



6 176 95



6 176 91



6 176 34

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 176 27	Single TV socket, female ○ White ● Anthracite ○ Ivory
10	6 177 27	
10	6 178 27 ¹	
10	6 176 26	Single TV socket, "F" type ○ White ● Anthracite ○ Ivory
10	6 177 26	
10	6 178 26 ¹	
10	6 176 32 ¹	TV-R-SAT socket TV: 5-68 / 120-862 MHz R: 87,5-108 MHz SAT: 950-2400 MHz Star low attenuation: 1,5 dB max. ○ White ● Anthracite ○ Ivory
10	6 177 32 ¹	
10	6 178 32 ¹	
10	6 176 38	Double TV socket, female + "F" type ○ White ● Anthracite ○ Ivory
10	6 177 38	
10	6 178 38 ¹	
10	6 176 30	TV-R socket ○ White ● Anthracite ○ Ivory
10	6 177 30	
10	6 178 30 ¹	

Pack	Cat.Nos	Telephone sockets
10	6 176 99	Telephone connection block 10 connections ○ White ● Anthracite ○ Ivory
10	6 177 99	
10	6 178 99 ¹	
10	6 176 95	BS master ○ White ● Anthracite ○ Ivory
10	6 177 95	
10	6 178 95 ¹	
10	6 176 96	BS secondary ○ White ● Anthracite ○ Ivory
10	6 177 96	
10	6 178 96 ¹	
10	6 176 97	RJ 11 socket ○ White ● Anthracite ○ Ivory
10	6 177 97	
10	6 178 97 ¹	
10	6 176 98	Double RJ 11 socket ○ White ● Anthracite ○ Ivory
10	6 177 98	
10	6 178 98 ¹	

Pack	Cat.Nos	Data sockets
10	6 176 91	RJ 45 Cat.6 UTP ○ White ● Anthracite ○ Ivory
10	6 177 91	
10	6 178 91 ¹	
10	6 176 92	Double RJ 45 Cat.6 UTP ○ White ● Anthracite ○ Ivory
10	6 177 92	
10	6 178 92 ¹	
10	6 176 17	1 gang - single Keystone adaptor ○ White ● Anthracite ○ Ivory
10	6 177 17	
10	6 178 17 ¹	
10	6 176 34	1 gang - double Keystone adaptor ○ White ● Anthracite ○ Ivory
10	6 177 34	
10	6 178 34 ¹	

1: Available on request

Belanko™ S

hotel equipment



6 176 12



6 176 37 + 5 720 78



6 176 18

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 176 12	16 A - 230 V~ - 50/60 Hz
1	6 177 12	Time delay of approx. 30 s after card removal
1	6 178 12 ¹	Use card with width max. 54 mm
		☐ White ☒ Anthracite ☐ Ivory
10	6 176 13	Hotel bedrooms call indicators
10	6 177 13	2 settings : - Do not disturb - Please clean the room
10	6 178 13 ¹	Indicator for corridor
		Installed in the corridor, displays calls
		Indicator and bell push: 230V~50/60Hz
		The LED color of "Do not Disturb" is red
		The LED color of "Make up room" is blue
		☐ White ☒ Anthracite ☐ Ivory
10	6 176 14	Internal control unit
10	6 177 14	Installed in the room, allows the user to select the
10	6 178 14 ¹	desired setting
		Internal control unit hotel room: 250V~16AX
		☐ White ☒ Anthracite ☐ Ivory
1	6 176 19	Security switch
1	6 177 19	1 A resistive - 250 V~
1	6 178 19 ¹	Panic button
		☐ White ☒ Anthracite ☐ Ivory
1	6 176 18	2 Gang vertical shaver socket
1	6 177 18	Conform to IEC 61558-2-5
1	6 178 18	Output: 115V/230V - 20VA - 50/60Hz
		Suitable for use with European, British, US,
		Australian and Chinese 2pin plugs
		☐ White ☒ Anthracite ☐ Ivory
20	6 176 37	Arteor adaptor
		Allows the integration of 2 modules Arteor
		mechanisms such as R.C.B.O., automatic switch,
		skirting light, USB charger, etc
		1 gang
		☐ White

1: Available on request


For integration of Arteor functions, see Arteor offer



Belanko™ S

hotel equipment

Guest Room Management System

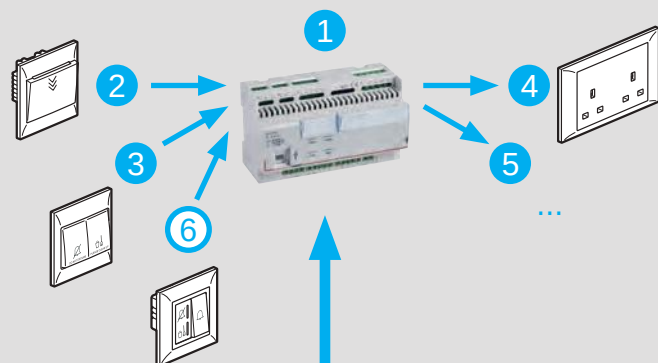

The Room Controller Unit, Cat.No 048408 or 048412, associated with mechanical Belanko™ S functions can manage the lights, sockets outlet, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.

For complementary information on the Room controller, please contact us





6 176 41



6 176 49



6 176 58



6 176 44

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~
		Conform to BS 1363-2
10	6 176 41	1 gang single pole switched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 41	
10	6 178 41 ¹	
5	6 176 46	2 gang single pole switched ☐ White ☒ Anthracite ☐ Ivory
5	6 177 46	
5	6 178 46 ¹	
10	6 176 40	1 gang unswitched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 40	
10	6 178 40 ¹	
5	6 176 45	2 gang unswitched ☐ White ☒ Anthracite ☐ Ivory
5	6 177 45	
5	6 178 45 ¹	
10	6 176 43	1 gang double pole switched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 43	
10	6 178 43 ¹	
5	6 176 48	2 gang double pole switched ☐ White ☒ Anthracite ☐ Ivory
5	6 177 48	
5	6 178 48 ¹	
10	6 176 42	1 gang single pole switched + neon ☐ White ☒ Anthracite ☐ Ivory
10	6 177 42	
10	6 178 42 ¹	
5	6 176 47	2 gang single pole switched + neon ☐ White ☒ Anthracite ☐ Ivory
5	6 177 47	
5	6 178 47 ¹	
5	6 176 49	2 gang single pole switched with red cover + neon ☒ Red

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~ with USB charger
		Conform to BS 1363-2:2016 Conform to IEC 60950-1
1	6 176 58	1 gang single pole switched USB A-Type 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W ☐ White ☒ Anthracite ☐ Ivory
1	6 177 58	
1	6 178 58 ¹	
1	6 176 57	1 gang unswitched USB A-Type 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W ☐ White ☒ Anthracite ☐ Ivory
1	6 177 57	
1	6 178 57 ¹	
1	6 176 44	2 gang single pole switched USB A-Type + C-Type 3 A - 5 V _{DC} - 15 W Consumption in passive mode < 0.08 W ☐ White ☒ Anthracite ☐ Ivory
1	6 177 44	
1	6 178 44 ¹	
10	6 176 50	1 gang unswitched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 50	
10	6 178 50 ¹	
10	6 176 51	1 gang single pole switched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 51	
10	6 178 51 ¹	
10	6 176 52	1 gang single pole switched + neon ☐ White ☒ Anthracite ☐ Ivory
10	6 177 52	
10	6 178 52 ¹	
10	6 176 53	2 gang single pole switched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 53	
10	6 178 53 ¹	

Pack	Cat.Nos	British Standard socket outlets 5 A - 250 V~
		Conform to BS 546
10	6 176 54	1 gang single pole switched ☐ White ☒ Anthracite ☐ Ivory
10	6 177 54	
10	6 178 54 ¹	

1: Available on request

Belanko™ S

socket outlets (continued)



6 176 64



6 176 55

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Euro/US socket outlets - 10 A - 250 V~ / 15 A - 127 V~
10	6 176 62	1 gang - 2 x 2P ○ White ● Anthracite ○ Ivory
10	6 177 62	
10	6 178 62 ¹	
10	6 176 90	1 gang - 2 x 2P switched ○ White ● Anthracite ○ Ivory
10	6 177 90	
10	6 178 90 ¹	
10	6 176 64	1 gang - 2 x 2P+E ○ White ● Anthracite ○ Ivory
10	6 177 64	
10	6 178 64 ¹	
10	6 176 56	German Standard socket outlet 16 A - 250 V~ 1 gang - 2P+E with shutters for child protection ○ White ● Anthracite ○ Ivory
10	6 177 56	
10	6 178 56 ¹	
10	6 176 67	Multistandard switched socket outlet 1 gang ○ White ● Anthracite ○ Ivory
10	6 177 67	
10	6 178 67 ¹	
4	6 176 69	2 gang ○ White ● Anthracite ○ Ivory
4	6 177 69	
4	6 178 69 ¹	
1	6 176 59	Multistandard switched socket outlets 16 A 250 V~ / 15 A - 127 V~ with USB charger Shuttered for child safety USB charger conform to IEC 60950-1 1 gang - 2P+E USB A-Type 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ○ Ivory
1	6 177 59	
1	6 178 59 ¹	
1	6 176 55	2 gang - 2 x 2P+E USB A-Type + C-Type 3 A - 5 V _{DC} - 15 W Consumption in passive mode < 0.08 W ○ White ● Anthracite ○ Ivory
1	6 177 55	
1	6 178 55 ¹	

1: Available on request

Belanko™ S

fused connection units and cable outlets



6 176 82



6 176 85

Material: Thermoplastic with glossy finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Fused connection units 13 A
10	6 176 80	Conform to BS 1363-4 Unswitched + cord outlet ○ White ● Anthracite ○ Ivory
10	6 177 80	
10	6 178 80 ¹	
10	6 176 81	Switched + cord outlet ○ White ● Anthracite ○ Ivory
10	6 177 81	
10	6 178 81 ¹	
10	6 176 60	Unswitched + neon + cord outlet ○ White ● Anthracite ○ Ivory
10	6 177 60	
10	6 178 60 ¹	
10	6 176 82	Switched + neon + cord outlet ○ White ● Anthracite ○ Ivory
10	6 177 82	
10	6 178 82 ¹	
10	6 176 85	Cable outlets Conform to BS 5733 20 A - 250 V~ ○ White ● Anthracite ○ Ivory
10	6 177 85	
10	6 178 85 ¹	
10	6 176 86	45 A - 250 V~ ○ White ● Anthracite ○ Ivory
10	6 177 86	
10	6 178 86 ¹	

1: Available on request

Belanko™ S

blanking plates and accessories



6 176 28




6 176 37 + 5 720 72



6 176 36



6 711 311 G



6 711 312 G

Pack	Cat.Nos	Blanking plates
10	6 176 28	1 gang Conform to BS 5733 ○ White ● Anthracite ○ Ivory
10	6 177 28	
10	6 178 28 ¹	
5	6 176 39	2 gang ○ White ● Anthracite ○ Ivory
5	6 177 39	
5	6 178 39 ¹	

20	6 176 37	Arteor adaptor Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting lights, USB charger, etc 1 gang ○ White
----	----------	--

1: Available on request

Pack	Cat.Nos	Fixing accessories
2	6 176 36	Splash-proof cover Mainly for socket protection IP 55 with or without plug engaged Space inside : 86 x 86 mm ● Mist grey
2	6 711 311 G	1 Gang Transparent
2	6 711 312 G	2 Gang Transparent

8	6 133 50	Surface-mounting boxes Conform to BS 5733 Depth 35 mm 1 gang ○ White
4	6 133 51	2 gang ○ White



For integration of Arteor functions, see Arteor offer



Belanko™ S


healthcare application



6 176 00 R




6 176 04 R




6 176 06 R



6 176 00 RR



6 176 04 RR



6 176 06 RR

picture or color are for illustration purposes

Conform to BS EN 60669-1

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang)


Supplied with 2 screws M3.5 for BS boxes

Single pole switches 16AX - 250v-


Pack	Cat.Nos	
10	6 176 00 R	1 gang 1 way switch c/w red rocker 
10	6 176 01 R	1 gang 2 way switch c/w red rocker 
10	6 176 02 R	2 gang 1 way switch c/w red rocker 
10	6 176 03 R	2 gang 2 way switch c/w red rocker 
10	6 176 04 R	3 gang 1 way switch c/w red rocker 
10	6 176 05 R	3 gang 2 way switch c/w red rocker 
10	6 176 06 R	4 gang 1 way switch c/w red rocker 
10	6 176 07 R	4 gang 2 way switch c/w red rocker 
10	6 176 09 R	Intermediate switch c/w red rocker 

Single pole switches 16AX - 250v-


Pack	Cat.Nos	
10	6 176 00 RR	1 gang 1 way switch c/w red plate 
10	6 176 01 RR	1 gang 2 way switch c/w red plate 
10	6 176 02 RR	2 gang 1 way switch c/w red plate 
10	6 176 03 RR	2 gang 2 way switch c/w red plate 
10	6 176 04 RR	3 gang 1 way switch c/w red plate 
10	6 176 05 RR	3 gang 2 way switch c/w red plate 
10	6 176 06 RR	4 gang 1 way switch c/w red plate 
10	6 176 07 RR	4 gang 2 way switch c/w red plate 
10	6 176 09 RR	Intermediate switch c/w red plate 




6 176 00 G




6 176 04 G




6 176 06 G



6 176 00 GG



6 176 04 GG



6 176 06 GG

picture or color are for illustration purposes

Conform to BS EN 60669-1

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Single pole switches 16AX - 250v-
10	6 176 00 G	1 gang 1 way switch c/w green rocker 
10	6 176 01 G	1 gang 2 way switch c/w green rocker 
10	6 176 02 G	2 gang 1 way switch c/w green rocker 
10	6 176 03 G	2 gang 2 way switch c/w green rocker 
10	6 176 04 G	3 gang 1 way switch c/w green rocker 
10	6 176 05 G	3 gang 2 way switch c/w green rocker 
10	6 176 06 G	4 gang 1 way switch c/w green rocker 
10	6 176 07 G	4 gang 2 way switch c/w green rocker 
10	6 176 09 G	Intermediate switch c/w green rocker 

Pack	Cat.Nos	Single pole switches 16AX - 250v-
10	6 176 00 GG	1 gang 1 way switch c/w green plate 
10	6 176 01 GG	1 gang 2 way switch c/w green plate 
10	6 176 02 GG	2 gang 1 way switch c/w green plate 
10	6 176 03 GG	2 gang 2 way switch c/w green plate 
10	6 176 04 GG	3 gang 1 way switch c/w green plate 
10	6 176 05 GG	3 gang 2 way switch c/w green plate 
10	6 176 06 GG	4 gang 1 way switch c/w green plate 
10	6 176 07 GG	4 gang 2 way switch c/w green plate 
10	6 176 09 GG	Intermediate switch c/w green plate 

Belanko™ S

healthcare application




6 176 41 G



6 176 46 R



6 176 41 RR



6 176 46 GG



6 176 46 RR

picture or color are for illustration purposes

Conform to BS 1363-2

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British standard socket outlets 13A -250V-
10	6 176 41 R	1 gang single pole switched c/w red rocker
5	6 176 46 R	2 gang single pole switched c/w red rocker
10	6 176 41 G	1 gang single pole switched c/w green rocker
5	6 176 46 G	2 gang single pole switched c/w green rocker

Pack	Cat.Nos	British standard socket outlets 13A -250V-
10	6 176 41 RR	1 gang single pole switched c/w red plate
5	6 176 46 RR	2 gang single pole switched c/w red plate
10	6 176 41 GG	1 gang single pole switched c/w green plate
5	6 176 46 GG	2 gang single pole switched c/w green plate

*For below healthcare application, please reach out local sales for stocks availability

Single pole 20AX -250v

Double pole switches 20A

Double pole switched socket outlet

BS socket outlet 13 A -250v with USB charger

Multistandard switched socket outlet 16A with USB charger

Belanko™ S white and colours



selection chart

		Pack	 White	 Anthracite	 Ivory
SINGLE POLE SWITCHES 16 AX - 250 V~					
1 gang - 1-way switch 1 gang - 2-way switch		10 10	6 176 00 6 176 01	6 177 00 6 177 01	6 178 00 ¹ 6 178 01 ¹
2 gang - 1-way switch 2 gang - 2-way switch		10 10	6 176 02 6 176 03	6 177 02 6 177 03	6 178 02 ¹ 6 178 03 ¹
Intermediate switch		10	6 176 09	6 177 09	6 178 09 ¹
3 gang - 1-way switch 3 gang - 2-way switch		10 10	6 176 04 6 176 05	6 177 04 6 177 05	6 178 04 ¹ 6 178 05 ¹
4 gang - 1-way switch 4 gang - 2-way switch		10 10	6 176 06 6 176 07	6 177 06 6 177 07	6 178 06 ¹ 6 178 07 ¹
SINGLE POLE SWITCHES 20 AX - 250 V~					
1 gang - 1-way switch 1 gang - 2-way switch		10 10	6 176 20 6 176 21	6 177 20 6 177 21	6 178 20 ¹ 6 178 21 ¹
2 gang - 1-way switch 2 gang - 2-way switch		10 10	6 176 22 6 176 23	6 177 22 6 177 23	6 178 22 ¹ 6 178 23 ¹
3 gang - 1-way switch 3 gang - 2-way switch		10 10	6 176 24 6 176 25	6 177 24 6 177 25	6 178 24 ¹ 6 178 25 ¹
PUSH-BUTTONS 6 A - 250 V~					
1 gang		10	6 176 10	6 177 10	6 178 10 ¹
2 gang		10	6 176 15	6 177 15	6 178 15 ¹
Bell push		10	6 176 11	6 177 11	6 178 11 ¹
2 gang for shutters		10	6 176 16	6 177 16	6 178 16 ¹
DOUBLE POLE SWITCHES 20 A - 250 V~					
1 gang - 1-way switch		10	6 176 73	6 177 73	6 178 73 ¹
1 gang - 1-way switch + red neon indicator + earth connection		10	6 176 71	6 177 71	6 178 71 ¹
1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking		10	6 176 72	6 177 72	6 178 72 ¹

1: Available on request

Belanko™ S white and colours

selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
DOUBLE POLE SWITCHES 45 A - 250 V~					
1 gang - 1-way switch		10	6 176 75	6 177 75	6 178 75 ¹
1 gang - 1-way switch + red neon indicator		10	6 176 76	6 177 76	6 178 76 ¹
2 gang - 1-way vertical switch + red neon indicator		10	6 176 77	6 177 77	6 178 77 ¹
COOKER CONTROL UNIT - 250 V					
45 A DP switch + red neon and 13 A BS switched socket outlet + red neon		5	6 176 78	6 177 78	6 178 78 ¹
DIMMERS					
500 W RL dimmer		1	6 176 31	6 177 31	6 178 31 ¹
300 W RLC+LED dimmer		1	6 176 35	6 177 35	6 178 35 ¹
VENTILATION CONTROL					
Fan control 250 V~ - 50 Hz		1	6 176 33	6 177 33	6 178 33 ¹
TELEVISION SOCKETS					
Single TV socket, female		10	6 176 27	6 177 27	6 178 27 ¹
Single TV socket, "F" type		10	6 176 26	6 177 26	6 178 26 ¹
Double TV socket, female + "F" type		10	6 176 38	6 177 38	6 178 38 ¹
TV-R socket		10	6 176 30	6 177 30	6 178 30 ¹
TELEPHONE SOCKETS					
Telephone connection block 10 connections		10	6 176 99	6 177 99	6 178 99 ¹
BS master BS secondary		10 10	6 176 95 6 176 96	6 177 95 6 177 96	6 178 95 ¹ 6 178 96 ¹
RJ 11 socket		10	6 176 97	6 177 97	6 178 97 ¹
Double RJ 11 socket		10	6 176 98	6 177 98	6 178 98 ¹

1: Available on request

Belanko™ S white and colours

selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
DATA SOCKETS					
RJ 45 Cat.6 UTP		10	6 176 91	6 177 91	6 178 91 ¹
Double RJ 45 Cat.6 UTP		10	6 176 92	6 177 92	6 178 92 ¹
Single Keystone adaptor - 1 gang		10	6 176 17	6 177 17	6 178 17 ¹
Double Keystone adaptor - 2 gang		10	6 176 34	6 177 34	6 178 34 ¹
HOTEL EQUIPMENT					
Key card switch 16 A - 230 V - 50/60 Hz		1	6 176 12	6 177 12	6 178 12 ¹
Hotel bedroom call indicator - Indicator for corridor		10	6 176 13	6 177 13	6 178 13 ¹
Hotel bedroom call indicator - Internal control unit		10	6 176 14	6 177 14	6 178 14 ¹
SECURITY SWITCH					
Panic button 1 A resistive - 250 V~		1	6 176 19	6 177 19	6 178 19 ¹
BRITISH STANDARD SOCKET OUTLETS 13 A - 250 V~					
1 gang single pole switched		10	6 176 41	6 177 41	6 178 41 ¹
2 gang single pole switched		5	6 176 46	6 177 46	6 178 46 ¹
1 gang single pole switched + USB charger A-Type 2.4 A		1	6 176 58	6 177 58	6 178 58 ¹
1 gang unswitched		10	6 176 40	6 177 40	6 178 40 ¹
2 gang unswitched		5	6 176 45	6 177 45	6 178 45 ¹
1 gang unswitched + USB charger A-Type 2.4 A		1	6 176 57	6 177 57	6 178 57 ¹
1 gang double pole switched		10	6 176 43	6 177 43	6 178 43 ¹
2 gang double pole switched		5	6 176 48	6 177 48	6 178 48 ¹

1: Available on request

Belanko™ S white and colours

selection chart (continued)

		Pack	White	Anthracite	Ivory
BRITISH STANDARD SOCKET OUTLETS 13 A - 250 V~ (CONTINUED)					
1 gang single pole switched + neon		10	6 176 42	6 177 42	6 178 42 ¹
2 gang single pole switched + neon		5	6 176 47	6 177 47	6 178 47 ¹
2 gang single pole switched + USB charger A-Type + 3A		1	6 176 44	6 177 44	6 178 44 ¹
2 gang single pole switched with red cover + neon		5	6 176 49	-	-
BRITISH STANDARD SOCKET OUTLETS 15 A - 250 V~					
1 gang unswitched		10	6 176 50	6 177 50	6 178 50 ¹
1 gang single pole switched		10	6 176 51	6 177 51	6 178 51 ¹
1 gang single pole switched + neon		10	6 176 52	6 177 52	6 178 52 ¹
2 gang single pole switched		10	6 176 53	6 177 53	6 178 53 ¹
BRITISH STANDARD SOCKET OUTLETS 5 A - 250 V~					
1 gang single pole switched		10	6 176 54	6 177 54	6 178 54 ¹
EURO/US SOCKET OUTLETS - 10 A - 250 V~ / 15 A - 127 V~					
1 gang - 2 x 2P		10	6 176 62	6 177 62	6 178 62 ¹
1 gang - 2 x 2P switched		10	6 176 90	6 177 90	6 178 90 ¹
1 gang - 2 x 2P+E		10	6 176 64	6 177 64	6 178 64 ¹
GERMAN STANDARD SOCKET OUTLET 16 A - 250 V~					
1 gang - 2P+E with shutters for child protection		10	6 176 56	6 177 56	6 178 56 ¹
MULTISTANDARD SWITCHED SOCKET OUTLET					
1 gang		10	6 176 67	6 177 67	6 178 67 ¹
2 gang		4	6 176 69	6 177 69	6 178 69 ¹

1: Available on request

Belanko™ S white and colours

selection chart (continued)

		Pack	 White	 Anthracite	 Ivory
MULTISTANDARD SWITCHED SOCKET OUTLET (CONTINUED)					
1 gang + USB charger A-Type 2.4 A		1	6 176 59	6 177 59	6 178 59 ¹
2 gang + USB charger A-Type + C-Type 3 A		1	6 176 55	6 177 55	6 178 55 ¹
FUSED CONNECTION UNITS					
Unswitched + cord outlet		10	6 176 80	6 177 80	6 178 80 ¹
Unswitched + neon + cord outlet		10	6 176 60	6 177 60	6 178 60 ¹
Switched + cord outlet		10	6 176 81	6 177 81	6 178 81 ¹
Switched + neon + cord outlet		10	6 176 82	6 177 82	6 178 82 ¹
CABLE OUTLETS					
20 A - 250 V~		10	6 176 85	6 177 85	6 178 85 ¹
45 A - 250 V~		10	6 176 86	6 177 86	6 178 86 ¹
BLANKING PLATES					
1 gang		10	6 176 28	6 177 28	6 178 28 ¹
2 gang		5	6 176 39	6 177 39	6 178 39 ¹
ARTEOR ADAPTOR					
1 gang		20	6 176 37	-	-

1: Available on request

Notes

Notes

Notes



FOLLOW US ALSO ON

-  legrand.com.sg
-  www.fb.com/legrandsingapore
-  youtube.com/user/legrand
-  twitter.com/legrand_news
-  pinterest.com/legrandgroup



Singapore

17 Neythal Road,
Singapore 628582

 : + 65 6416 1550
Fax: + 65 6416 1580